


Catalog

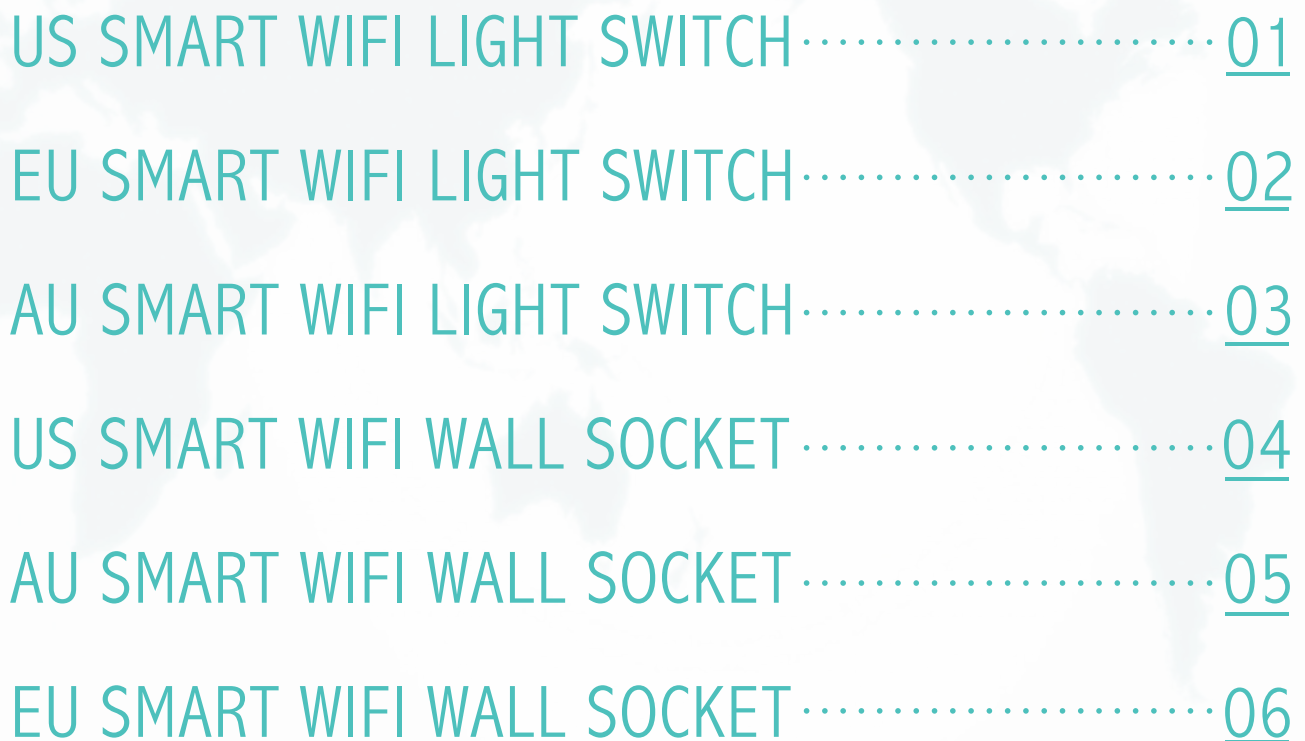

| | |
|--------------------------------------|-----------|
| US SMART WIFI LIGHT SWITCH..... | <u>01</u> |
| EU SMART WIFI LIGHT SWITCH..... | <u>02</u> |
| AU SMART WIFI LIGHT SWITCH..... | <u>03</u> |
| US SMART WIFI WALL SOCKET..... | <u>04</u> |
| AU SMART WIFI WALL SOCKET..... | <u>05</u> |
| EU SMART WIFI WALL SOCKET..... | <u>06</u> |
| WI-FI RANGE EXTENDER SMART PLUG..... | <u>07</u> |
| PORTABLE WIFI SMART PLUG | <u>08</u> |

KS-7011 US 120 Style Smart Wall Dimmer Switch

Support: for stepless dimming



Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Dimmer
- 6.Overload Protection

Specifications:

Power supply mode: Neutral+live wire

Rated voltage: AC110V~125V(50/60Hz)

Load power: INC 500W(Max)

LED 150W(Max)

Wireless standard: IEEE802.11b/g/n

Working frequency: 2.412~2.484GHz

Wireless security support: WEP/WPA-PSK/WPA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$

Working environment: $-20^{\circ}C \sim 75^{\circ}C$

Working humidity: $<95\%$

Controlling distance: no distance limitation

Product size: 125*80*42MM

KS-7012 US 120 Style Smart Wall Dimmer Switch

Support:6 Level Dimmable Switch



Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Dimmer
- 6.Overload Protection

Specifications:

Power supply mode: Neutral+live wire

Rated voltage: AC110V~125V(50/60Hz)

Load power: INC 500W(Max)

LED 150W(Max)

Wireless standard: IEEE802.11b/g/n

Working frequency: 2.412~2.484GHz

Wireless security support: WEP/WPA-PSK/WPA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$

Working environment: $-20^{\circ}C \sim 75^{\circ}C$

Working humidity: $< 95\%$

Controlling distance: no distance limitation

Product size: 125*80*42MM

KS-602K/H US Style Smart Wall Light Switch



Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Overload Protection
- 6.ON/OFF physical keys

Specifications:

- Power supply mode: Neutral+live wire
- Rated current: 15A(Max)
- Rated voltage: AC110V~125V(50/60Hz)
- Rated power: 1650W
- Wireless standard: IEEE802.11b/g/n
- Working frequency: 2.412~2.484GHz
- Wireless security support: WEP/WPA-PSK/PA2-PSK
- Encryption type: WEP/AES/TKIP
- Static power loss: $\leq 0.5W$
- Working environment: $-20^{\circ}C \sim 75^{\circ}C$
- Working humidity: $< 95\%$
- Controlling distance: no distance limitation
- Product size: 125*80*32MM

KS-602S US 120 Style Smart Wall Light Switch



Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Overload Protection
- 6.Physical Button

Specifications:

Power supply mode: Neutral+live wire

Rated current: 15A(Max)

Rated voltage: AC110V~125V(50/60Hz)

Rated power: 1650W

Wireless standard: IEEE802.11b/g/n

Working frequency: 2.412~2.484GHz

Wireless security support: WEP/WPA-PSK/WPA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$

Working environment: $-20^{\circ}C \sim 75^{\circ}C$

Working humidity: $< 95\%$

Controlling distance: no distance limitation

Product size: 120*70*35.5MM

KS-602 US 120 Style Smart Wall Light Switch



Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Overload Protection
- 6.Touch Switch
- 7.LED noctilucent navigation

Specifications:

Power supply mode: Neutral+live wire

Rated current: 15A(Max)

Rated voltage: AC110V~125V(50/60Hz)

Rated power: 1650W

Wireless standard: IEEE802.11b/g/n

Working frequency: 2.412~2.484GHz

Wireless security support: WEP/WPA-PSK/WPA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$

Working environment: $-20^{\circ}C \sim 75^{\circ}C$

Working humidity: $<95\%$

Touch life: Over 100 thousand times

Controlling distance: no distance limitation

Product size: 120*70*35.5MM

KS-602F US 120 Style Smart Wall Light 3-Way Switch



Support: 1 Pack



Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Overload Protection
- 6.Physical Button
- 7.LED noctilucant navigation
- 8.3-Way switch

Specifications:

Power supply mode: Neutral+live wire

Rated voltage: AC110V~125V(50/60Hz)

Load power: INC 500W(Max)

LED 150W(Max)

Wireless standard: IEEE802.11b/g/n

Working frequency: 2.412~2.484GHz

Wireless security support: WEP/WPA-PSK/WPA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$

Working environment: $-20^{\circ}C \sim 75^{\circ}C$

Working humidity: $< 95\%$

Conteolling distance: no distance limitation

Product size: 125*80*37.5MM

KS-811 AU/US Smart Wall Light Switch

Support: Single Wire

Support: Neutral+ Hot wire



Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Overload Protection
- 6.Physical Button
- 7.LED noctilucet navigation

Specifications:

Power supply mode: live wire+ [Neutral (Optional)]

Rated voltage: AC100V~250V(50/60Hz)

Load power: INC 600W(Max)

LED 150W(Max)

Wireless standard: IEEE802.11b/g/n

Working frequency: 2.412~2.484GHz

Wireless security support: WEP/WPA-PSK/WPA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$

Working environment: $-20^{\circ}C \sim 75^{\circ}C$

Working humidity: $< 95\%$

Conteolling distance: no distance limitation

Product size: 116*75*35MM

KS-601 EUR 86 Style Smart Wall Light Switch



Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Overload Protection
- 6.Touch Switch
- 7.LED noctilucent navigation

Specifications:

Power supply mode: Neutral+live wire

Rated voltage: AC100V~240V(50/60Hz)

Load power: INC 600W(Max)/Gang

LED 150W(Max)/Gang

Wireless standard: IEEE802.11b/g/n

Working frequency: 2.412~2.484GHz

Wireless security support: WEP/WPA-PSK/WPA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$

Working environment: $-20^{\circ}C \sim 75^{\circ}C$

Working humidity: $<95\%$

Touch life: Over 100 thousand times

Controlling distance: no distance limitation

Product size : 86*86*32MM

KS-611 EUR 80*80 Style Smart Wall Light Switch



Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Overload Protection
- 6.ON/OFF physical keys

Specifications:

Power supply mode : Neutral+live wire

Rated voltage : AC100V ~240V(50/60Hz)

Load power: INC 600W(Max)/Gang

LED 150W(Max)/Gang

Wireless standard: IEEE802.11b/g/n

Working frequency: 2.412 ~2.484GHz

Wireless security support: WEP/WPA-PSK/PA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$


Working environment: $-20^{\circ}C \sim 75^{\circ}C$

Working humidity: $< 95\%$

Controlling distance: no distance limitation

Product size : 80*80*42.8MM

KS-605 EUR 86 Style Smart Dimmer Wall Switch

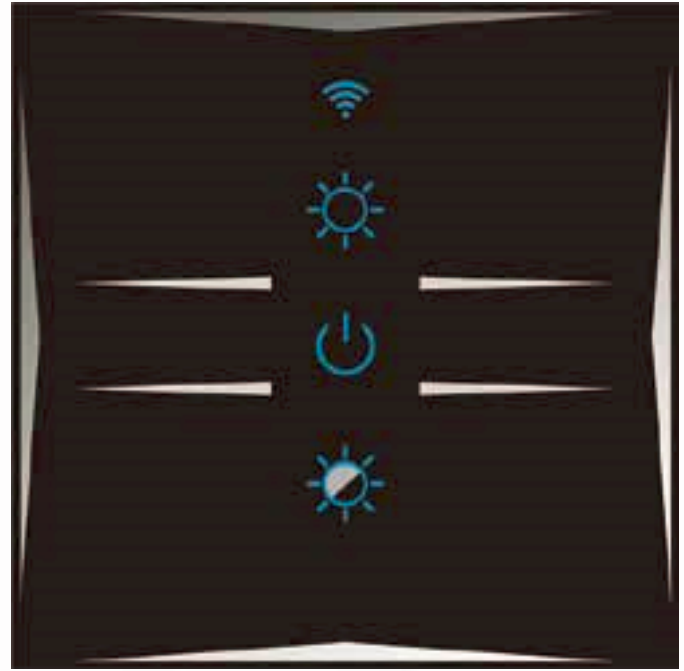

Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Overload Protection
- 6.Touch Switch
- 7.LED noctilucent navigation
- 8.Dimmer

Specifications:

Power supply mode: Neutral+live wire

Rated voltage: AC100V~240V(50/60Hz)

Load power: INC 500W(Max)

LED 150W(Max)

Wireless standard: IEEE802.11b/g/n

Working frequency: 2.412~2.484GHz

Wireless security support: WEP/WPA-PSK/WPA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$

Working environment: $-20^{\circ}C \sim 75^{\circ}C$



Working humidity: $<95\%$

Touch life: Over 100 thousand times

Controlling distance: no distance limitation

Product size : 86*86*32MM

KS-606 EUR 86 Style Smart 3-Way Switch

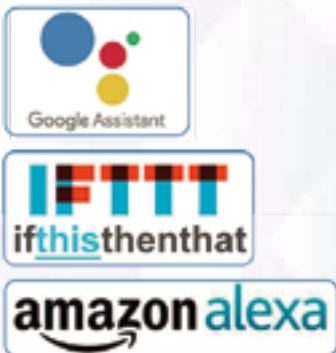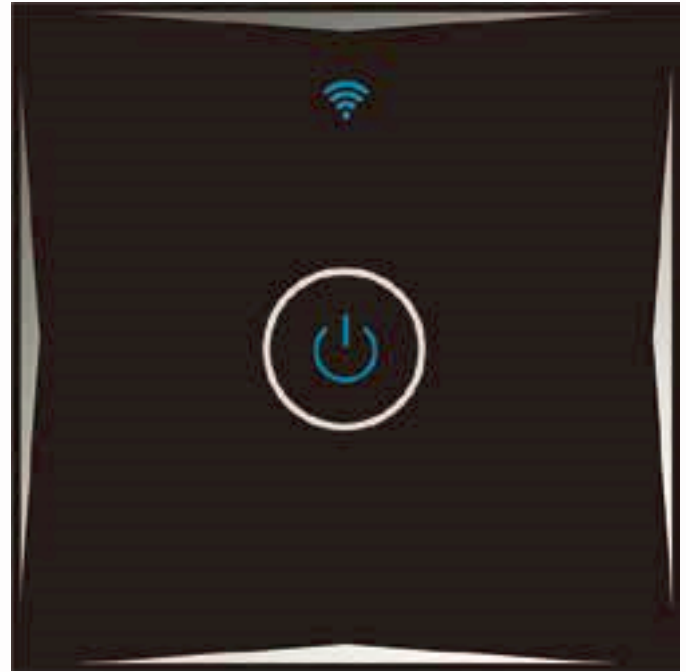

Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Overload Protection
- 6.Touch Switch
- 7.LED noctilucent navigation

Specifications:

Power supply mode: Neutral+live wire

Rated voltage: AC100V~240V(50/60Hz)

Load power: INC 500W(Max)

LED 150W(Max)

Wireless standard: IEEE802.11b/g/n

Working frequency: 2.412~2.484GHz

Wireless security support: WEP/WPA-PSK/WPA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$

Working environment: $-20^{\circ}C \sim 75^{\circ}C$


Working humidity: $<95\%$

Touch life: Over 100 thousand times

Controlling distance: no distance limitation

Product size: 86*86*32MM

KS-607 EUR 86 Style Smart Curtain Wall Switch

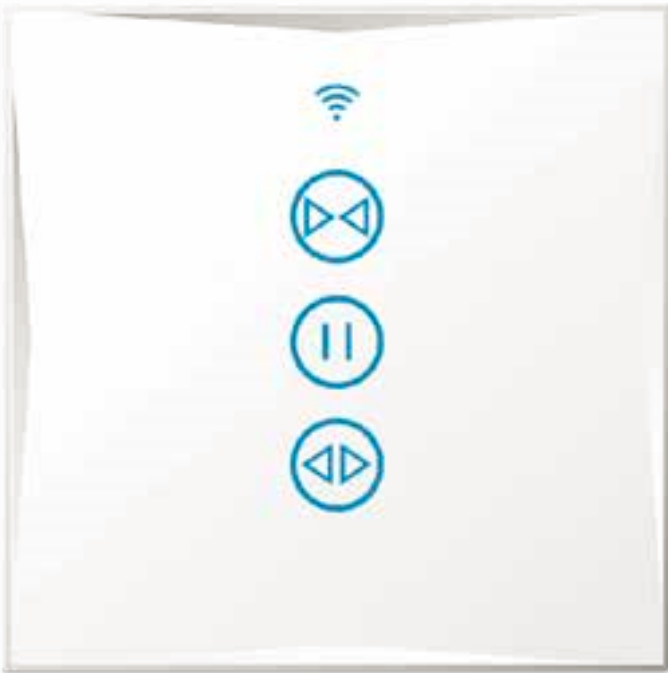

Functions:

1. Mobile Remote Control
2. Timing
3. Countdown
4. Sharing
5. Overload Protection
6. Touch Switch
7. LED noctilucent navigation

Specifications:

Power supply mode: Neutral+live wire

Rated voltage: AC100V~240V(50/60Hz)

Load power: Inductive Load<500W

½ HP Motor(Max)

Wireless standard: IEEE802.11b/g/n

Working frequency: 2.412~2.484GHz

Wireless security support: WEP/WPA-PSK/WPA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$

Working environment: -20 °C~75 °C

Working humidity: <95%

Touch life: Over 100 thousand times

Controlling distance: no distance limitation

Product size: 86*86*32MM

KS-604 US 120 Style Smart Wall Socket



Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Overload Protection
- 6.ON/OFF physical keys
- 7.Two outlets Design
- 8.TR Design

Specifications:

Power supply mode : Neutral+live wire

Rated current: 15A(Max)

Rated voltage: AC110V ~125V(50/60Hz)

Load power: Single 1500W (120V)

Total 2500W (120V)

Inductive Load < 2000W

Wireless standard : IEEE802.11b/g/n

Working frequency: 2.412~2.484GHz

Wireless security support: WEP/WPA-PSK/W-PA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$

Working environment: $-20^{\circ}C \sim 75^{\circ}C$

Working humidity: <95%

Controlling distance: no distance limitation

Product size: 125*80*42.3 MM

KS-604S US 120 Style Smart Wall Socket



Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Overload Protection
- 6.ON/OFF physical keys
- 7.Two outlets Design
- 8.USB Charging port
- 9.TR Design

Specifications:

Power supply mode : Neutral+live wire

Rated current: 15A(Max)

Rated voltage: AC110V ~125V(50/60Hz)

Load power: Single 1500W (120V)

Total 2500W (120V)

Inductive Load<2000W

USB output : 5V/2.1A

Wireless standard: IEEE802.11b/g/n

Working frequency: 2.412~2.484GHz

Wireless security support: WEP/WPA-PSK/W-PA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$

Working environment: $-20^{\circ}C \sim 75^{\circ}C$

Working humidity: <95%

Controlling distance: no distance limitation

Product size: 125*80*42.3 MM

KS-821 Australia Smart Wall Power Socket

Equipped with L and N double-break design



Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Overload Protection
- 6.ON/OFF physical keys

Specifications:

Power supply mode : Neutral+live wire

Rated current: 15A(Max)

Rated voltage: AC100V ~250V(50/60Hz)

Load power: 2500W(Max)

Inductive Load<2000W

Wireless standard: IEEE802.11b/g/n

Working frequency: 2.412~2.484GHz

Wireless security support: WEP/WPA-PSK/W-PA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$

Working environment: $-20^{\circ}C \sim 75^{\circ}C$

Working humidity: <95%

Controlling distance: no distance limitation

Product size: 116*75*35 MM

KS-621 EUR 80*80 Style Smart Wall Socket

Support: Energy Monitor Function
Adopt Magnetic Holding Relay



Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Overload Protection
- 6.ON/OFF physical keys

Specifications:

Power supply mode : Neutral+live wire

Rated current: 16A(Max)

Rated voltage: AC100V~250V(50/60Hz)

Load power: 2500W(Max)

Inductive Load<2000W

Wireless standard: IEEE802.11b/g/n

Working frequency: 2.412~2.484GHz

Wireless security support: WEP/WPA-PSK/WPA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$


Working environment: $-20\text{ }^{\circ}\text{C}\sim 75\text{ }^{\circ}\text{C}$

Working humidity: <95%

Controlling distance: no distance limitation

Product size: 80*80*57.2MM

KS-622 UK Smart Wall Double Power Point Socket

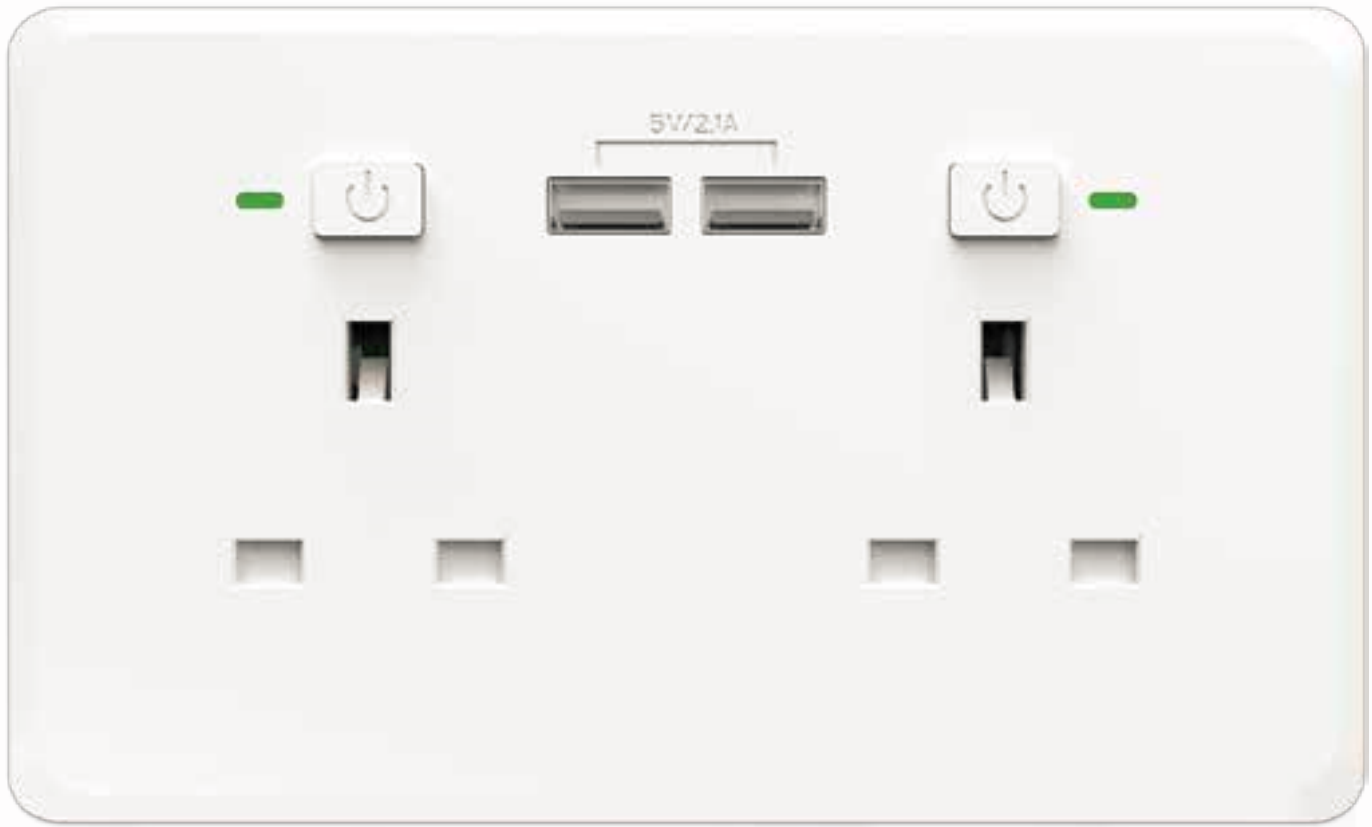

Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Overload Protection
- 6.ON/OFF physical keys
- 7.Double Power point Design
- 8.Double USB Chager

Specifications:

Power supply mode: Neutral+live wire

Rated current: 13A(Max)

Rated voltage: AC100V~250V(50/60Hz)

Load power: 2500W(Max)

Inductive Load<2000W

USB output : 5V/2.1A(Total)

Wireless standard: IEEE802.11b/g/n

Working frequency: 2.412~2.484GHz

Wireless security support: WEP/WPA-PSK/WPA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$

Working environment: $-20^{\circ}C \sim 75^{\circ}C$

Working humidity: <95%

Controlling distance: no distance limitation

Product size: 150*90*38.3MM

KS-503 Wi-Fi Range Extender Smart Plug



Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Overload Protection
- 6.ON/OFF Physical key
- 7.Wi-Fi Repeater
- 8.USB charging port (5V/1A or 5V/2.1A)
- 9.WPS one key connection

Specifications:

Rated current: 15A(Max)

Rated voltage: AC100V~240V(50/60Hz)

Rated power: 2200W

USB output: 5V/1A or 5V/2.1A

Wireless standard: IEEE802.11b/g/n

Working frequency: 2.412~2.484GHz

Wireless security support: WEP/WPA-PSK/WPA2-PSK

Encryption type: WEP/AES/TKIP

Static power loss: $\leq 0.5W$

Working environment: $-20^{\circ}C \sim 75^{\circ}C$

Working humidity: 10%-80%

Product size: 102*38*34.5MM

KS-501 Portable Wi-Fi Smart Plug



Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Sharing
- 5.Overload Protection
- 6.ON/OFF Physical keys
- 7.USB charging port (5V/1A)

Specifications:

Rated current : 10A(Max)

Rated voltage : AC100V~240V(50/60Hz)

Rated power : 2200W

USB output : 5V/1A

Wireless standard : IEEE802.11b/g/n

Working frequency : 2.412~2.484GHz

Wireless security support : WEP/WPA-PSK/WPA2-PSK

Encryption type : WEP/AES/TKIP

Static power loss : $\leq 0.5W$

Working environment : $-20^{\circ}C \sim 75^{\circ}C$

Working humidity : 10%~80%

Product size : 73*69*36.5MM



KS-101 RGB



KS-101 CW



Functions:

- 1.Mobile Remote Control
- 2.Timing
- 3.Countdown
- 4.Dimmer
- 5.Sharing

Specifications

Power supply Mode: Neutral+Live Wire

Rated Current: 0.13A(Max)

Rated Voltage: AC100V~250V(50/60Hz)

Load Power: LED 5W/10W

Wireless Standard: IEEE802.11b/g/n

Working Frequency: 2.412~2.484GHz

Wireless Security Support: WEP/WPA-PSK/WPA2-PSK

Encryption Type: WEP/AES/TKIP

Static Power Loss: $\leq 0.5W$

Working Environment: $-20^{\circ}C \sim 75^{\circ}C$

Working Humidity: $<80\%$

Installation Specification: E27